



CONCRETE SIDEWALK AND CURB RESTORATION DETAIL

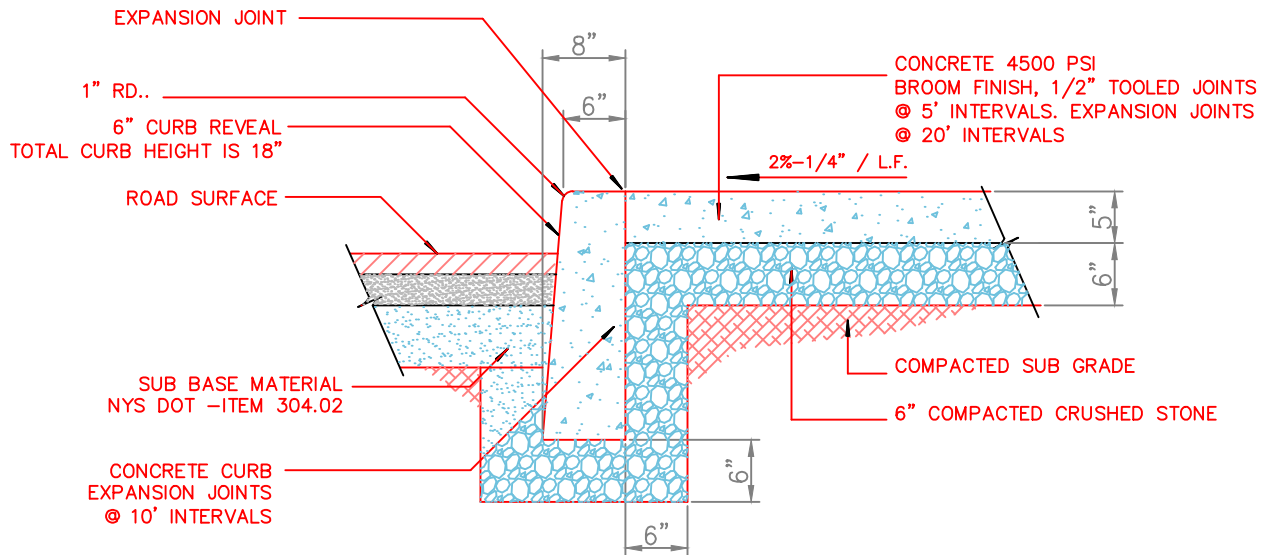

CONCRETE SIDEWALK AND
STANDARD CURB DETAIL

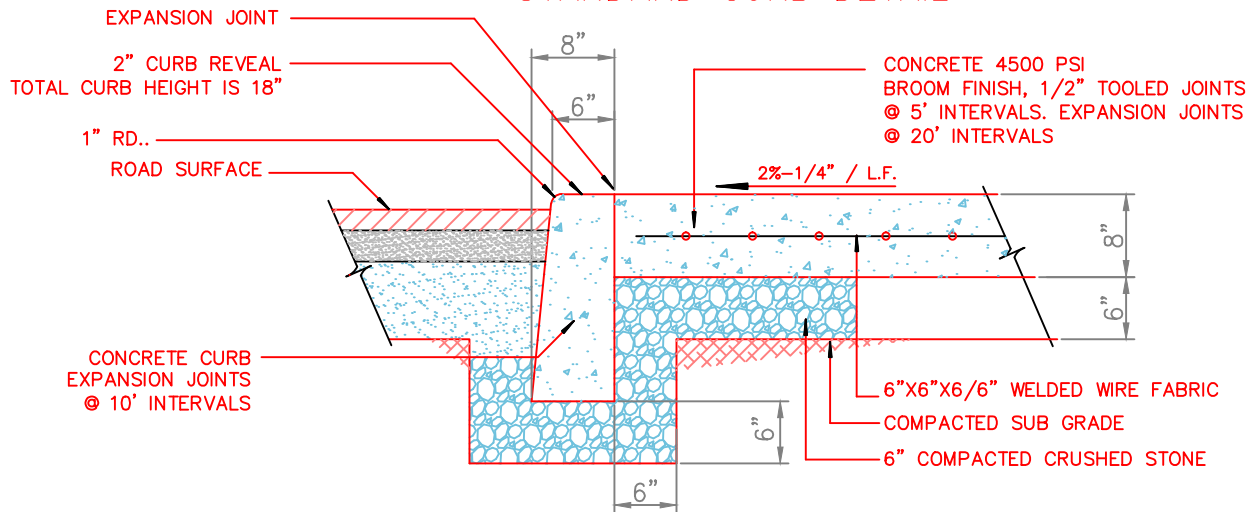

CONCRETE DRIVEWAY AND
DROP CURB DETAIL

GENERAL NOTES:

1. CONTRACTOR MUST HAVE INSPECTION PRIOR TO PLACING GRAVEL OR POURING CONCRETE.
2. NO WORK TO BE DONE ON WEEKENDS OR HOLIDAYS UNLESS INSPECTOR IS NOTIFIED AND ARRANGMENTS HAVE BEEN MADE WHERE AN INSPECTOR CAN BE PRESENT AT THE CONTRACTOR'S EXPENSE.
3. ENTIRE WORK AREA TO BE KEPT CLEAN AND PROPERLY BARRICADED. A MINIMUM FOUR FEET OF PEDESTRIAN RIGHT OF WAY IS TO BE PROVIDED AND MAINTAINED AROUND THE CONSTRUCTION AREA. ALL DWELLINGS, UNITS AND BUSINESSES MUST HAVE PROPER ACCESS.
4. NO ASH IS ALLOWED IN PLACE OF GRAVEL.
5. ALL UTILITY CASTINGS MUST BE FLUSH WITH SIDEWALK SURFACE. NO TRIPPING HAZARDS OR ENCROACHMENTS ARE PERMITTED.
6. NO TREE ROOTS ARE TO BE DAMAGED, CUT OR REMOVED WITHOUT CITY ARBORIST APPROVAL.

<p>CITY OF YONKERS DEPARTMENT OF ENGINEERING</p>	
<p>TYPICAL SIDEWALK DETAILS</p>	
DATE:	3/23/2012
DWG NO.:	SDT1
SHEET:	1 OF 1
SCALE:	NOT TO SCALE
DRAWN BY:	JM
CHECKED BY:	JR

